


# POLYETHYLENE PIPES L-POL FOR HYDRAULIC TRANSPORT

## GROUP: HYDRAULIC TRANSPORT

VER. 1.01

### SYSTEM DESCRIPTION

Pipes made of HDPE polyethylene with increased resistance to abrasion are perfect for transport of water-based suspensions of sand, gravel and other aggregates extracted in gravel pits. The service life of the pipes increases the possibility of turning the pipes during operation. Pipes are available as standard in 12-metre sections and in shorter sections as required by the customer. Fixed or movable steel flanges with pitch diameter and holes adapted to the existing installation are used for connecting pipes.

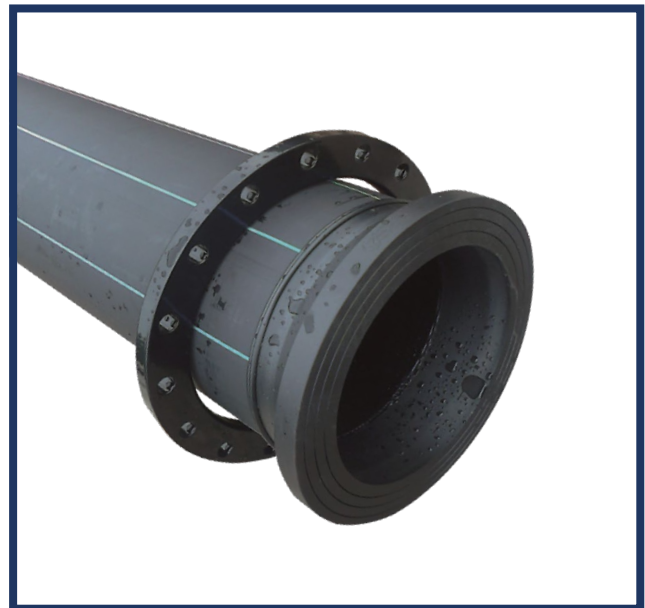

#### TECHNICAL SPECIFICATION

Flange	Internal diameter	Max. length
Fixed / rotating	250 - 450 mm	up to 12 mb